

CORRECT SIGN INSTALLATION INCREASES MOTORIST SAFETY

Eighty-five percent of all motor vehicles that run off the road recover safely within 30 feet of the roadway in a clear zone, according to a recent study by General Motors.

Although a 30-foot clear zone is not always possible, it's a good concept to try to achieve. Fewer barriers adjacent to the road increases motorist safety.

- ▶ **Remove** fixed objects and provide traversable terrain.
- ▶ **Relocate** objects outside the clear zone.
- ▶ **Retrofit** objects that cannot be removed or relocated by making them breakaway or crashworthy.
- ▶ **Shield** the hazards that cannot be improved by installing guardrails, barriers or crash cushions.
- ▶ **Delineate** the hazard as a temporary measure if the methods above are impractical.

Hazards

Road signs often are placed in the clear zone so they will be in the driver's line of sight. Therefore, the construction of road sign posts and foundations is critical. Road signs should be placed on safe sign supports so that they do not become a bigger hazard than the situation they are meant to improve.

A support post must be able to hold a particular sign in the proper position and withstand normal loads from wind and other sources, yet safely yield when struck by a vehicle.

Placement

A sign placed close to the roadway is more likely to be struck than one that is set farther away. Whenever possible, place signs where they are not likely to be struck by out-of-control vehicles. The following are some considerations for placing road signs:

- Avoid placing signs on curves such as the outside of horizontal curves.
- Avoid placing signs next to lane drops or other places where the pavement narrows.
- Provide an unobstructed view of signs along the roadway.
- Place signs behind guardrails or other barriers whenever possible.


- Avoid placing signs in the bottom of ditches.
- Space signs along the roadway so they don't obstruct the view of each other.

Recommended spacing is 100 feet to 200 feet apart. Signs should not be clustered together.



Sign installation tips

- Bury posts in firm ground 4 feet deep. Loose or sandy soil may require deeper post placement.
- Use breakaway sign supports to enhance roadside safety.
- Use sign connections that prevent vandalism.

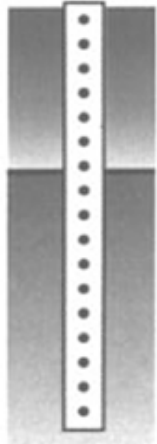

Height

The *Manual on Uniform Traffic Control Devices* states: “Signs erected at the side of the road in rural districts shall be mounted at a height of at least 5 feet, measured from the bottom of the sign to the near edge of the pavement.


“In business, commercial and residential districts where parking and/or pedestrian movement is likely to occur or where obstructions are present, the clearance to bottom of the sign must be at least 7 feet. The height of the bottom of a secondary sign mounted below another sign may be one foot less than the appropriate height specified above.”

Lateral clearance

Signs should have the maximum lateral clearance that is practical from the edge of the traveled roadway for the safety of motorists who might leave the roadway and strike the sign supports. Existing guardrails, overcrossing structures and other conditions should be used to minimize the exposure of sign supports to traffic. Otherwise, sign supports should be breakaway or yielding.

Normally, signs should not be closer than six feet from the edge of the shoulder, or 12 feet away from the edge of the traveled roadway if no shoulder is present. Although two feet are recommended as a working urban minimum, a clearance of one foot from the curb face is permissible where the sidewalk width is limited or where existing poles are close to the curb.

The diagrams show the proper height and lateral locations of signs. Note that the lateral placement of signs in rural districts is a six-foot minimum and out to 12 feet when possible.

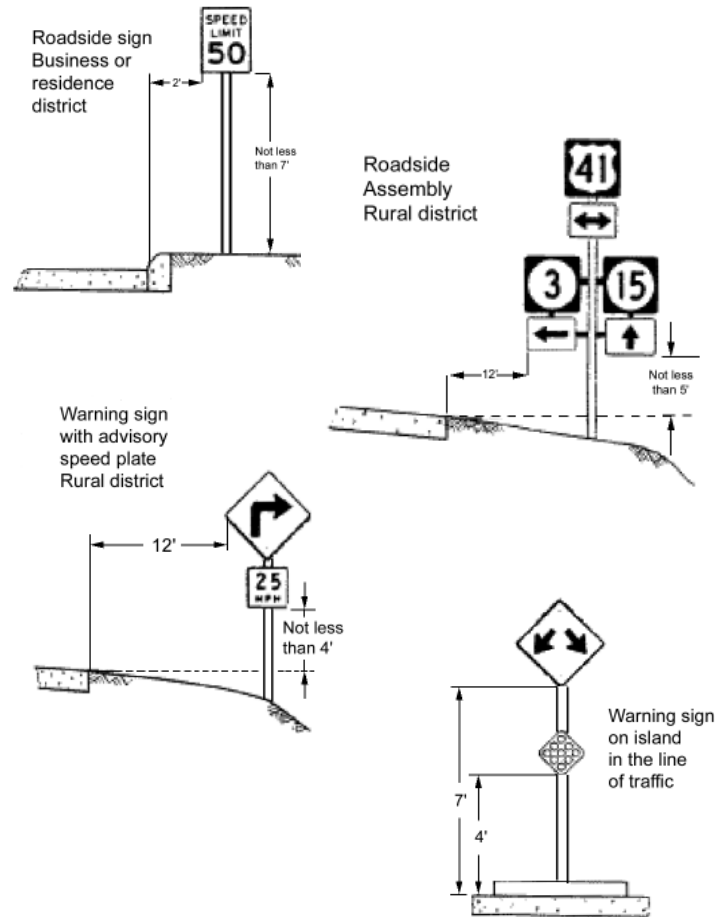

U-channel steel posts

The U-channel rolled steel post is a common small sign support. It is considered breakaway because it will bend or breakaway at the post/base connection at the ground line when it is hit. This improves safety and makes repairs easier.

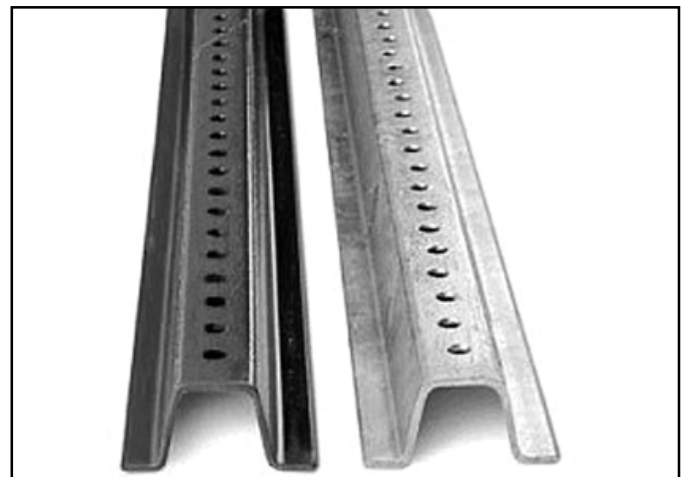


Photo of typical U-channel posts. The silver post has been galvanized.

The manufacturer of U-channel steel posts must provide certification that the posts and hardware have essentially the same chemistry, mechanical properties and geometry as that used in the Federal Highway Administration tests and will meet the FHWA change in velocity requirements.

Certification must also be provided that the U-channel lap splice system will develop the full shear and bending yield strength of the sign post section being spliced.

Supports

Posts should be either the square tube post or the U-channel type. Signs mounted with the square tube posts should be installed as follows:



Area (square feet)	Mounting with (P-5) square tube post (inches)
Up to 7.5	Single 2¼ x 2¼ post
Over 7.5 to 15	Two 2¼ x 2¼ posts
Over 15 to 20	Two 2½ x 2½ posts



Examples of typical square tube posts which are sometimes used in proper sign installation.

Single post installations should be in accordance with NDOT specifications. Signs with two posts require a slip base and should be installed according to the manufacturer's recommendations (except that the sign post anchor should be embedded at least 4 feet below the ground surface). Signs mounted with U-channel post should be installed as follows:

Area (square feet)	Mounting with (P-5) U-Channel posts
Up to 10	Single post
Over 10 to 20	Two posts

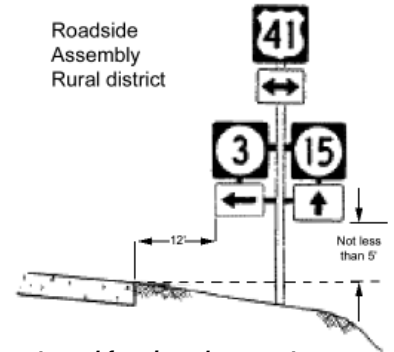


An example of a U-channel post used for sign placement and installation.

Panels

For typical installations of small signs (up to 2 square meters), use a hot-dipped galvanized button-head bolt with a slot in the head and nut with a lock washer.

There should be a minimum of 6 mm of threads beyond nuts on all signs after they are securely fastened. Signs with a width greater than or equal to 1.2 meters, or an area more than 0.75 square meters up to and including 2 square meters, require two posts.

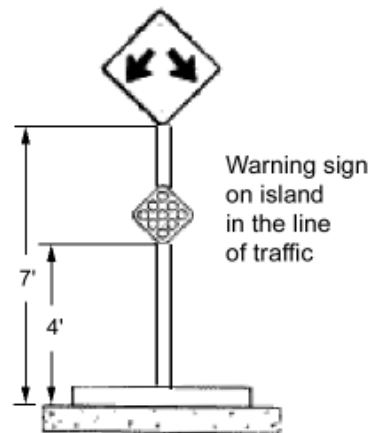

Adapted with permission from the Baystate Roads Program Tech Note #40.

For additional information, contact the Nevada T² Center at the address shown below.

StreetWise is published periodically by the Nevada Transportation Technology Transfer Center at the University of Nevada, Reno. The publication contains rewritten material compiled from reliable sources, but it assumes no responsibility for their correctness.

The Nevada T² Center is part of the nationwide Local Technical Assistance Program. It is financed jointly by the Nevada Department of Transportation and the Federal Highway Administration.

StreetWise

Nevada T² Center/257
University of Nevada, Reno
Reno, NV 89557

Phone: 775/784-1433 • FAX: 775/784-1429

The University of Nevada, Reno is an Equal Opportunity/Affirmative Action employer and does not discriminate on the basis of race, color, religion, sex, age, creed, national origin, veteran status, physical or mental disability, and in accordance with university policy, sexual orientation, in any program or activity it operates. The University of Nevada, Reno employs only United States citizens and aliens lawfully authorized to work in the United States. 1/94. 1,000.



University of Nevada, Reno

Nevada T² Center/257
Reno, NV 89557-0179

NONPROFIT
ORGANIZATION
U.S. Postage
PAID
Reno, NV
Permit No. 26